

Poultry coop handlers


Lift capacities @ 48" load centre

Optional equipment & attachments

Powershift automatic transmission

20/20 or 20/40 rotator carriages for pullet or broiler handling

Wide variety of forks

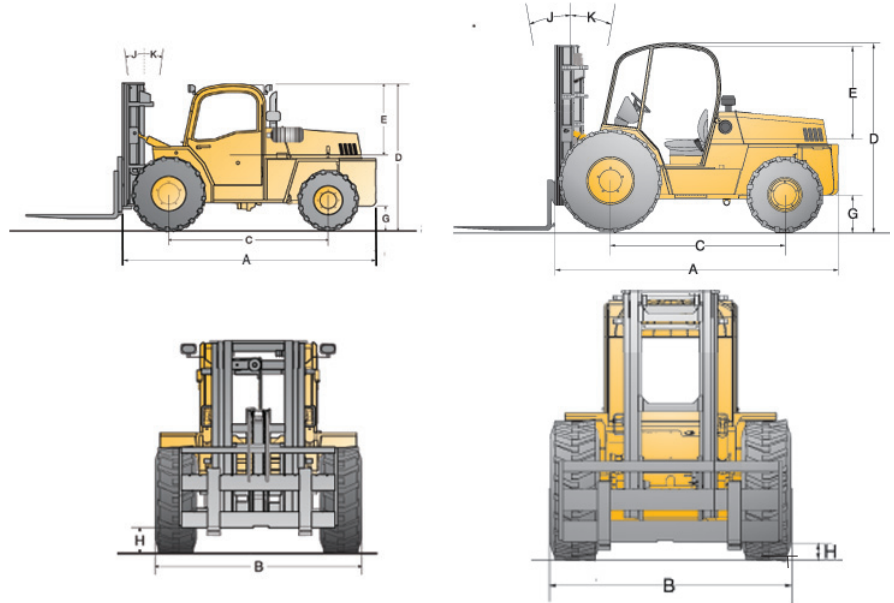

Model	Ref	SLP-60	S60
Lift capacities @ 48 inch load centre		3 800 lbs/1,724 kg	3 800 lbs/1,724 kg
Overall length (without forks)	A	147"/3 733 mm	149"/3 785 mm
Overall width	B	78"/1 981 mm	89"/2 261 mm
Wheelbase	C	93"/2 362 mm	89"/2 261 mm
Height to top of overhead guard (poultry)	D	75"/1 905 mm	85"/2 159 mm
Distance from seat to overhead guard (poultry)	E	40"/1016 mm	40"/1016 mm
Outside turning radius		2WD: 178"/4 521 mm 4WD: 196"/4 978 mm	178"/4 521 mm
Aisle width 90° stacking		2WD: 260"/6 604 mm 4WD: 278"/7 061 mm	266"/6 756 mm
Frame underclearance	G	11"/279 mm	15"/381 mm
Mast underclearance	H	12"/305 mm	12"/305 mm
Mast sideshift		6"/152 mm	6"/152 mm
Mast tilt - forward	J	20°	45°
Mast tilt - rearward	K	10°	12°
Gradeability		25%	25%
Tire size type & size (standard)	Drive (pneumatic)	15 - 19.5 - 12 ply	15.5 x 25 - 12 ply
	Steer (pneumatic)	12 - 16.5 - 10 ply	14 x 17.5 - 14 ply
Engine manufacturer & model		Ecomax T4i turbocharged interim Tier 4 diesel	
Cylinders		4	
Engine output (gross power)		74 hp @ 2 200 rpm	
Peak torque		243 ft-lbs @ 1 100 rpm	
Transmission type (optional)		4-speed fully automatic powershift	